


REPAIR SOLUTION FOR COMMERCIAL VEHICLE





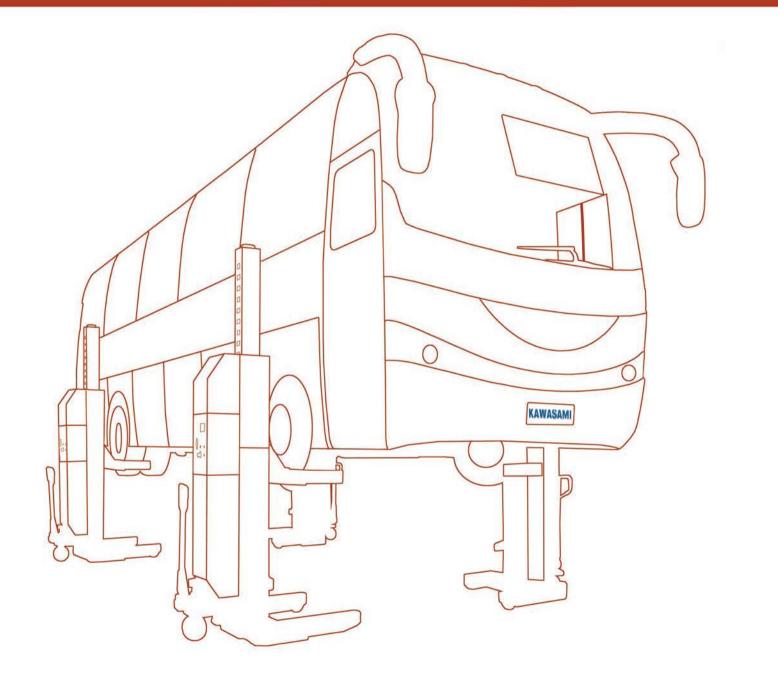

TECHNICAL SPECIFICATION

model	KW-2160	KW-2180
connection type	cabled	cabled
column quantity	2	2
lifting capacity	6000 kg/set	8000 kg/set
lifting height	0 - 1750 mm	0 - 1750 mm
fork arm length	784 - 1124 mm	784 -1124 mm
time of rising/falling	120 s/110 s	120 s/110 s
working voltage	220 V/380 V	220 V/380 V
column weight	500 kg	520 kg
column size	780×530×2450 mm	780×530×2450 mm
	(fork arm no	ot included)

Features

- ◆ Adjustable wheel support for more kinds of wheels;
- ◆ Double-safety guaranteed by both hydraulic flow control and mechanical locks;
- SCM technology guarantees synchronization;
- ◆ LCD screen shows the exact lifting height and fault warnings; ◆ Remote control handle with
- 5meters cable available; ◆ Recommended for medium size

vehicle, e.g. SUV, RV, pickup etc.;

TECHNICAL SPECIFICATION

connection type

column quantity

lifting capacity

applicable tire diameter

time of rising/falling

working voltage

charging voltage

column weight

column size

lifting height



KW-4075

wireless

30000 kg/set

0 - 1650 mm

500 - 1120 mm

120 s/110 s

DC 24 V

110 V/220 V

670 kg

1100×1330×2250 mm

KW-4175

cabled

30000 kg/set

0 - 1650 mm

500-1120 mm

120 s/110 s

220 V/380 V

610 kg

1100×1330×2250 mm





KW-6075

wireless

45000 kg/set

0 - 1650 mm

500 - 1120 mm

120 s/110 s

DC 24 V

110 V/220 V

670 kg

1100×1330×2250 mm

- ◆ Master / Slave columns;
- ◆ Operation at each column, up / down / lock;
- With or without cable at your choice;
- ◆ Hydraulic drive, insensitive and nearly maintenance-free.

(Kawasana AUTO EQUIPMENT

- ◆ Flattended base frame for vehicles with low ground clearance;
- Adjustable wheel support for more kinds of wheels;
- ◆ Double-safety guaranteed by both hydraulic flow control and mechanical locks;
- SCM technology guarantees synchronization;
- LCD screen shows the exact lifting height and fault warnings;
- Movable column makes your work easy and comfortable;
- Remote control handle with 5meters cable available;
- Hydraulic pallet jack at your choice;

OPTIONAL PARTS

oduct name	axle stand		
ting capacity	7500 kg/pc		
ting height	1390 - 2040 mm		
and weight	67 kg/pc		



product name	hydraulic jack	
lifting capacity	25000 kg/pc	
lifting height	680 -1200 mm	
jack weight	83 kg/pc	



product name	lifting beam	
lifting capacity	15000 kg/pc	1
beam size	3860×600×300-640 mm	
beam weight	380 kg	











KW-6175

cabled

45000 kg/set

0 - 1650 mm

500 -1120 mm

120 s/110 s

220 V/380 V

610 kg

1100×1330×2250 mm

- Lifting beam available;