



ART. 9450.402

Hose reels with ABS drum - s. 430-450-530

Enclosed fixed hose reel in ABS, s.430, for oil and similar, 150 bar, with black rubber hose 15 m, $\varnothing$ 1/2"



FLUIDS

FRESH OIL | ANTIFREEZE

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | MANUFACTURING INDUSTRY

CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	150
Compatible fluids		oils and similar products
Swivel joint		zinc plated steel
Seals		polyurethane
Characteristic		fixed
Material		painted steel with ABS drum
Couplings		zinc plated steel
Hose		996.315
$\varnothing$ and hose length	$\varnothing$ - m	1/2" - 15
Inlet		G 1/2" (f)
Outlet		G 1/2" (m)
Reel flow path		zinc plated steel
Internal drum width	mm	140

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

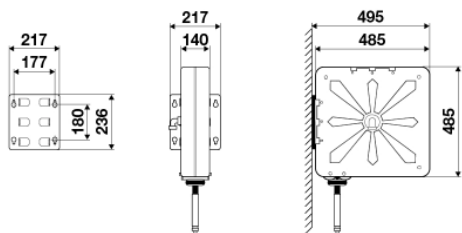

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.