







Functions And Features

- Made from Aluminum alloy,304 stainless steel mirror reflector and other special material
- Applying to drying the painting work for spot damage from the car body, avoiding the heating. Up the whole spray booth which highly reduce the cost.
- Curing area is 1000*2000mm, suitable for drying the spot damage under one area of three panels
- Unique electronic timer, digital control system for half-power or full-power optional: Each emitter can be independently controlled.

Technical Parameters		Curing Time Reference			
Туре	SG-6D	Drogogo Drojagt	Cattinga		
Input Voltage	1PH220V	Process Project	Set time		
Frequency	50Hz/60Hz	Drimor Anti-rust Casting	10		
Rated Power	6KW	Primer Anti-rust Coating	10min		
Adjustable Height	400-2500mm	Dutter	10.15		
Preheating Time	1-5min	Putty	10-15min		
Drying Time	1-15min	l la devece t	F unction		
Curing Distance	600-800mm	Undercoat	5min		
Working Current	5-30A	luterre diete Or et	E 40min		
Curing Temperature	60-70℃	Intermediate Coat	5-10min		
Curing Area	1000*1000mm	Finishing Orat	E 40min		
Dimensions	1300*1200*2300mm	Finishing Coat	5-10min		
Short Wave	2.1µm		40.45		
Weight	65kgs	Varnish	10-15min		

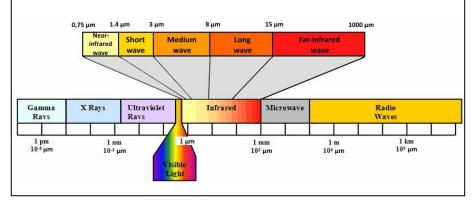

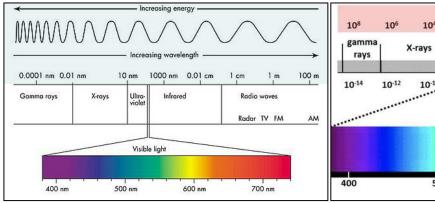

			Energy (electron volts,	eV)			
10 ⁸	10 ⁶	104	10 ²	1 10-2	10-4	10-6	10-8	10-8
gamma rays		X-rays	ultraviolet rays	infrared rays	radar	FM T	v short- wave	AM
10-14	10-12	10-10	. 10.8	10 ⁻⁶ 10 ⁻⁴	10-2	1	10 ²	104
			Wavelength	h (meters, m)	10-2			
			Wavelength				······	••••